

Your Retailer:

DIY Floors www.diyfloors.com 07 3246 2715







Beautiful, comfortable

Titan flooring will help you to create a space that you will love coming home to. Whether you need an extra-resilient floor that can handle your family's demanding routines, or a trendy new statement for your next renovation.



Waterproof

- 100% waterproof flooring panels
- Suitable for bathrooms, laundries & kitchens
- Resists most all household spills



Matching Accessories

Matching accessories for Titan Hybrid ranges for a beautiful finish



Quiet & comfortable

- Excellent footfall sound reduction
- Simply more comfortable underfoot



Scratch resistant

- Resistant to scratching and marking
- Strong wear layer to protect from everyday wear and tear



Non toxic

- 100% ortho-phthalate free
- Safe for the whole family to live on



Family friendy

• Built to withstand daily wear and tear



Realistic designs

- A range of exclusive designs, including stunning Australian wood species decors
- Generous plank size with incredible authenticity

& practical

The Titan range includes 2mm and 5mm glue-down vinyl plank and two generously sized hybrid plank flooring ranges. Titan Hybrid is a rigid core flooring product with integrated underlay. It has all the benefits of vinyl while requiring far less subfloor preparation and installation time.



Easy to clean

- Low maintenance due to its protective coating & matt finish
- Wet mop friendly



Impact resistant

More indentation resistant than many other hard flooring options



Compatible with floor heating

 Can be installed over in-slab floor heating systems with a subfloor temperature up to 27°C degrees (refer to installation instructions)



Pet friendly

• Muddy paws and little accidents... no problem!



Low impact noise *

• Titan Hybrid has achieved a 6 star rating for multistorey noise, making it ideal for apartment living.



Uniclic® installation system *

- Fastest and easiest installation system
- Can be walked on during and immediately after installation



^{*}Feature applicable tp Titan Hybrid range only





Titan Hybrid is a rigid core plank with a highly resilient surface structure. Almost as beautiful as real timber but far more tolerant to water, scratches and indentation. The extra wide and long planks in the XXL range provides a generous reveal that exudes style in any open space.



Driftwood TIRXXL943



River Sand Oak TIRXXL907



Midland Oak TIRXXL906



Pale Slate TIRXXL942



Antricite Oak TIRXXL944



Washed Oak TIRXXL949



Blackbutt Select TIRXXL1002



Tasmanian Oak TIRXXL1045



Spotted Gum TIRXXL1042



Brush Box TIRXXL1044

Titan Hybrid XXL

1800 x 225 x 6mm | with bevel 1 box = 1.62m² = 4 planks







Equally magnificent in a smaller, narrower format is Titan Hybrid. This range of carefully chosen designs, rigorously tested for durability, will stay beautiful for years to come.







Spotted Gum

TIR169



Bleached Blackbutt

TIR171



Alpine Grey Ash

Frosted Ironbark

TIR179



Sandblasted Blackbutt



Spring Valley Oak

TIR180

TIR181



Moonlight Gum



Warm Urban Oak

TIR183


Titan Hybrid

1500 x 180 x 6mm | with bevel $1 \text{ box} = 1.62 \text{m}^2 = 6 \text{ planks}$







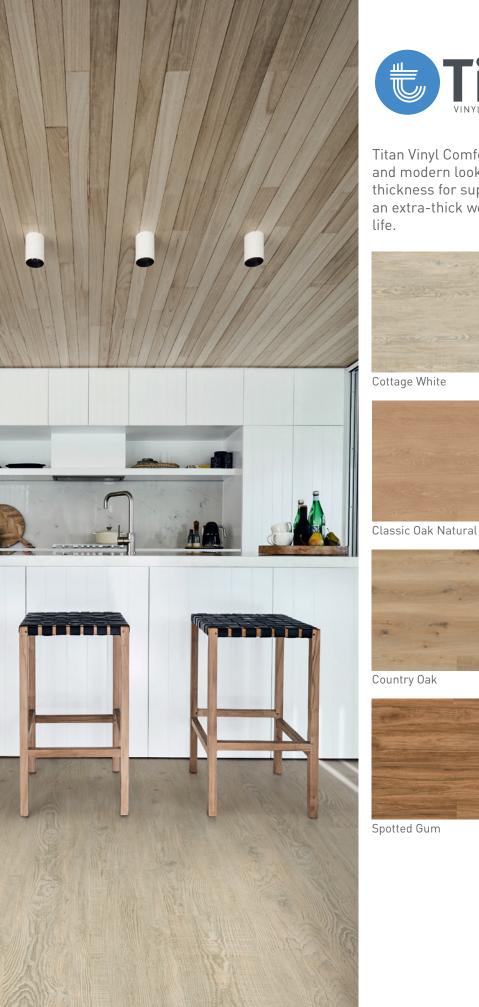



Titan Vinyl Comfort glue-down planks will bring a sleek and modern look to your home. Featuring a generous 5mm thickness for superb underfoot comfort and quietness and an extra-thick wear layer to withstand the rigours of daily



Cottage White TIC037 Patina Oak Light Grey





TIC008

TIC001





Classic Oak Light Beige



Blackbutt TIC035





Spotted Gum

TIC169

Rustic Oak

TIC038

Titan Vinyl Comfort


1505 x 185 x 5mm | no bevel $1 \text{ box} = 2.23 \text{m}^2 = 8 \text{ planks}$







Titan Vinyl Glue planks are a cost effective option, when you don't want to compromise on the look and durability of your floor. With 16 fashionable designs there's a Titan Vinyl Glue decor to suit every room in your home.

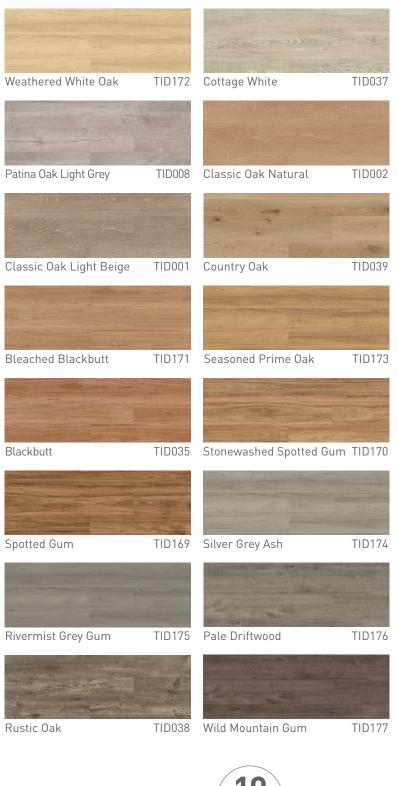

Titan Vinyl Glue

 $1505 \times 185 \times 2mm \mid no bevel$ $1 box = 5.012m^2 = 18 planks$











Large format click planks with a rigid core, ideal for mildly uneven subfloors.







Subfloor	Mildly regular subfloor Minimal floor preparation needed	Mildly regular subfloor Minimal floor preparation needed UNICLIC PATENTED TECHNOLOGY 20 years		
Installation	UNICLIC PATENTED TECHNOLOGY			
Residential warranty	20 years			
Walk noise reduction	•••			
Plank size	1800 x 225mm	1500 x 180mm		
Plank thickness	6mm (including 1mm built-in underlay)	6mm (including 1mm built-in underlay)		
Wear layer	0.50mm - Class 33	0.50mm - Class 33		





Extra thick, glue down planks for softness and comfort.



Thin glue down planks ideal for a cost effective renovation project.





Level subfloor Floor preparation need	Level subfloor ded Floor preparation needed
Glue	Glue
15 years	10 years
•••	••••
1505 x 185mm	1505 x 185mm
5mm	2mm



Titan Hybrid offers a complete solution with perfectly matching accessories for a beautiful finish of your floor.



Scotia
TIVSCOT(-)
2400 x 15 x 15mm
Discreet 15mm matching and waterproof scotia



Stair NoseTIVSTP(-)
2400 x 110 x 36mm
Matching 'custom look' stair nose to finish stairs beautifully



Expansion Cover
TIVEXC(-)
2400 x 45mm
Matching low profile and
waterproof expansion cover



End profileRVE3.4CH
6mm end profile in champagne
finish enabling transitions to floor
coverings such as carpet,windows
frames and walls



Product Specification Standard

Electric Behaviour

Indoor Air Quality

Residential Warranty

Plasticizer

EN 1815

Domestic use

Smoke 81%

≤2KV

Low VOC

Ortho-phthalate

20 year wear

warranty

Smoke 81%

≤2KV

free

Low VOC

Ortho-phthalate

20 year wear

warranty









Smoke 118%

≤2KV

Low VOC

Ortho-phthalate

10 year wear

warranty

Smoke 168%

≤2KV

Low VOC

Ortho-phthalate

15 year wear

warranty

Product Specification	Standard	HYBRIDXXL	HYBRID	VINYL COMFORT	VINYL GLUE
Vinyl Category		SPC plank	SPC plank	Glue down LVT	Glue down LVT
Dimensions		1800 x 225mm	1500 x 180mm	1505 x 185mm	1505 x 185mm
Total Thickness	EN ISO 24346	6mm	6mm	5mm	2mm
Wear Layer Thickness	EN ISO 24340	0.50mm	0.50mm	0.55mm	0.30mm
Usage Class	EN ISO 10874	Class 33 - AC5	Class 33 - AC5	Class 33 - AC5	Class 32 - AC4
Pack Size		1.62m² (4 planks)	1.62m² (6 planks)	2.23m² (8 planks)	5.01m2 (18 planks)
Pack Weight		16kg	16.5kg	19.4kg	16.5kg
Pallet Size		90.72m² (52 packs)	84.24m² (52 packs)	144.75m² (65 packs)	325.78m² (65 packs)
Pallet Weight		930kg	890kg	1222kg	1073kg
Density	EN 436	2000kg/m3	2000kg/m3	N/A	N/A
Surface Treatment		UV (anti-bacterial)	UV (anti-bacterial)	PU (anti-bacterial)	PU (anti-bacterial)
Physical Property	Test Method				
Dimensional Stability	EN ISO 23999	≤0.25%	≤0.25%	≤0.15%	≤0.25%
Curling after Exposure to Heat	EN ISO 23999	≤1mm	≤1mm	≤1mm	≤2mm
Squareness & Straightness	EN 16511	<400mm: <0.25mm >400mm: >0.35mm	<400mm: <0.25mm >400mm: >0.35mm	<400mm: <0.25mm >400mm: >0.35mm	<400mm: <0.25mm >400mm: >0.35mm
Residual Indentation	EN ISO 24343-1	≤0.1mm	<0.1mm	<0.1mm	<0.1mm
Light Fastness	EN ISO 105-B02	≽ 6	≽ 6	≽6	≥6
Impact Sound Reduction	EN ISO 140-7	6 star Certificate available	6 star Certificate available	4 star	3 star
Slip Resistance	AS/NZS4586 2004	P3	P3	P2	P2
Abrasion Group	EN660-2 / EN16511	Group T / AC5 (0.50)	Group T / AC5 (0.50)	Group T / AC5 (0.55)	Group T / AC4 (0.30)
Fire Resistance	AS/ISO 9239.1-2003	10.7 kW/m²	10.7 kW/m²	8.7 kW/m ²	6.4 kW/m ²

